



Multi-channel round jet nozzles for air Series 600.326.5K

Series 600.326.5K

The multi-channel round jet nozzles of the 600.326 series generate a powerful, circular air jet. The noise level and air consumption remain low even at higher air pressures. The special geometry at the nozzle outlet prevents air penetration into human skin. These nozzles comply with the OSHA standards.



Cost savings

9 %



Noise reduction

17 %



Material
ABS



Blowing force
2.2 N at 2 bar



Noise level
74 db(A) at 2 bar




Air consumption
 $V_{LN} = 15 \text{ m}^3/\text{h}$ at 2 bar



Pressure
 $p_{\text{max}} = 6 \text{ bar}$



Max. temperature
50 °C

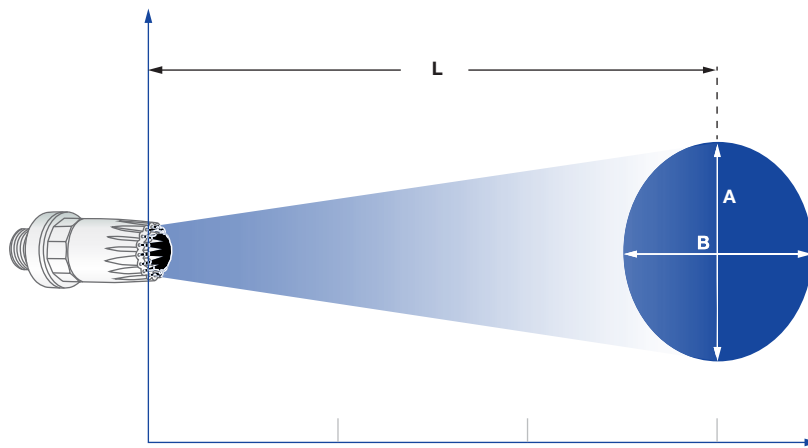


Jet pattern of 600.326.5K nozzle series


Pressure:	1 bar	3 bar	5 bar
Distance L [mm]:	700	900	900

Jet image dimensions at L


A [mm]:	160	220	260
B [mm]:	160	220	260

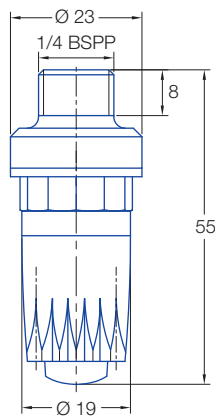


Code AC

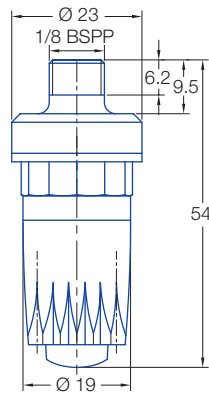


Code AA

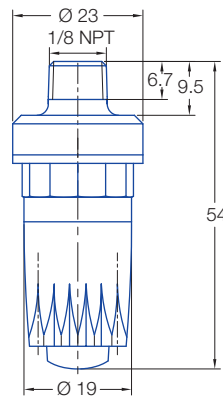

Code BA



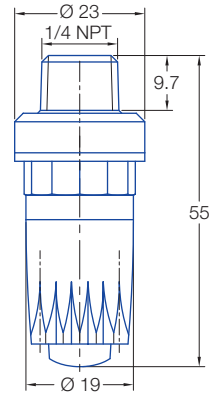


Code BC

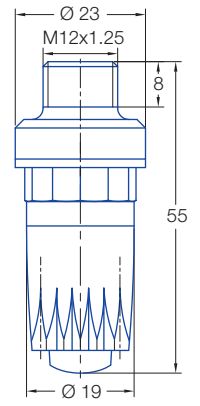

Code HG

Technical data

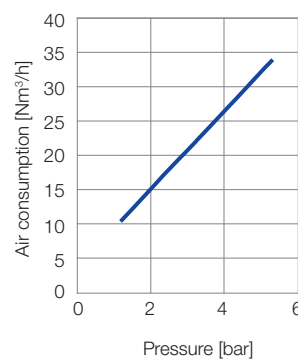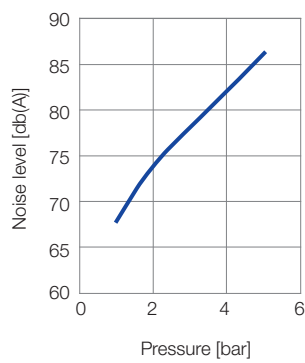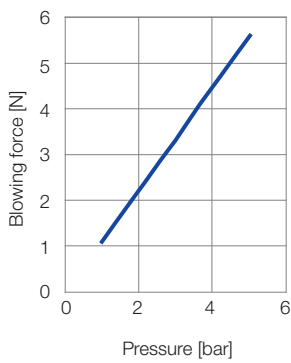

Ordering no.		Connection thread
Type	Code	
600.326.5K (Material: ABS)	AC	1/4 BSPP
	AA	1/8 BSPP
	BA	1/8 NPT
	BC	1/4 NPT
	HG	M12 x 1.25

Example	Type	+	Code	=	Ordering no.
of ordering:	600.326.5K	+	AC	=	600.326.5K.AC