

# BBS/FKK

## BALL VALVE WITH FLANGES, SHORT PATTERN

**DN 250-300 | PN 10-25**

**FULL BORE**

### MATERIALS

MATERIALS	PN	DN	Type 1	Type 2
Body	10-25	250-300	Steel	Steel
Ball	10-25	250-300	Ductile iron, hard chromed	Ductile iron, hard chromed
Sealings	10-25	250-300	NBR	PTFE

### INFORMATION

#### Ball Valve with flanges

/// Length face-to-face DIN EN 558 FTF 28

/// Flange dimensions DIN EN 1092-1, Form B1


/// TÜV-type approval

/// Scope of delivery without switch handle; on request with worm gear, pneumatic or electrical or electric drive available.

### OPTIONS

/// Other shapes of flange sealing surfaces on request

/// Special designs on request

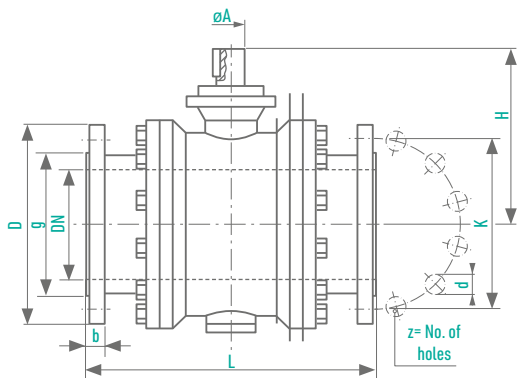

	DN	PN	L	D	g	K	b	z	d	H1	øA	Wght	Order-Number	
													Type 1	Type 2
<b>PN 10</b> Raised face	250	10	650	395	320	350	26	12	22	385	60	230	0156925	0156945
	300	10	750	445	370	400	26	12	22	427	60	420	0156927	0156947
<b>PN 16</b> Raised face	250	16	650	405	320	355	26	12	26	385	60	240	0156930	0156950
	300	16	750	460	378	410	28	12	26	427	60	430	0156932	0156952
<b>PN 25</b> Raised face	250	25	650	425	335	370	32	12	30	385	60	255	0156935	0156955
	300	25	750	485	395	430	34	16	30	427	60	445	0156937	0156957